

MOHAWK / ZIPPER TROUBLESHOOTING

Setting the Wheel Distance


THIS IS AN ADDENDUM TO YOUR CLOSING WHEELS MOUNTING INSTRUCTIONS

POINT OF MEASUREMENT


Q: *At what point on the closing wheels should I measure in-between in order to achieve the recommended 2.25" (2"-2.5") distance between the two wheels?*

A: *Measure from the bottom edge of the round cast ring—minus the fingers—at its lowest point.*


Mohawk/Zipper with plastic hubs & Mohawk/Zipper Rings part #: MO MOR MOML/R SMOR ZPL/R ZRL/R ZPLM/RM

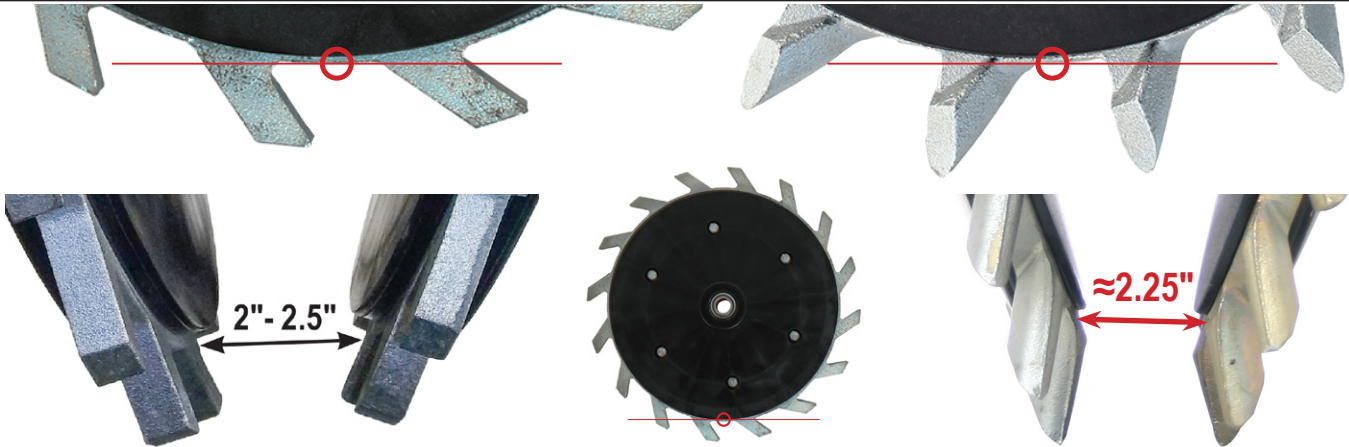

Cast Mohawk/Zipper part #: CMO ZCL/R

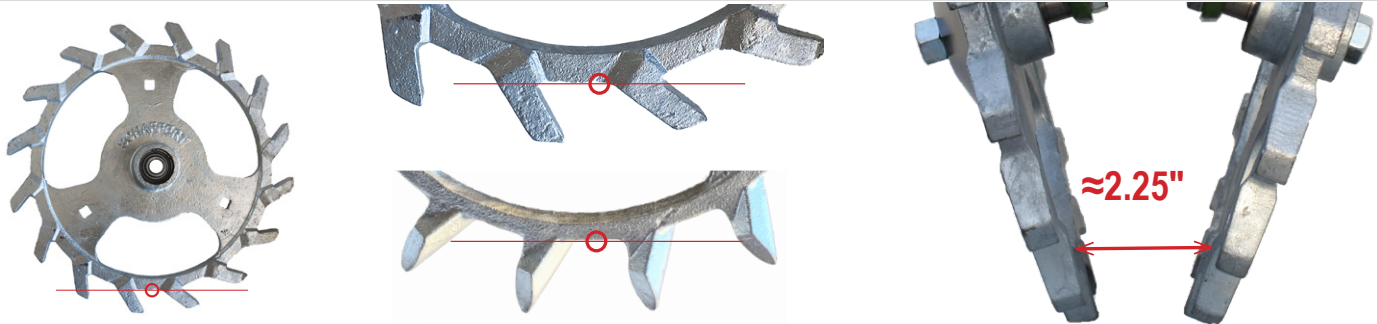

Mohawk/Zipper Max part #: MMAX ZMAXL/R

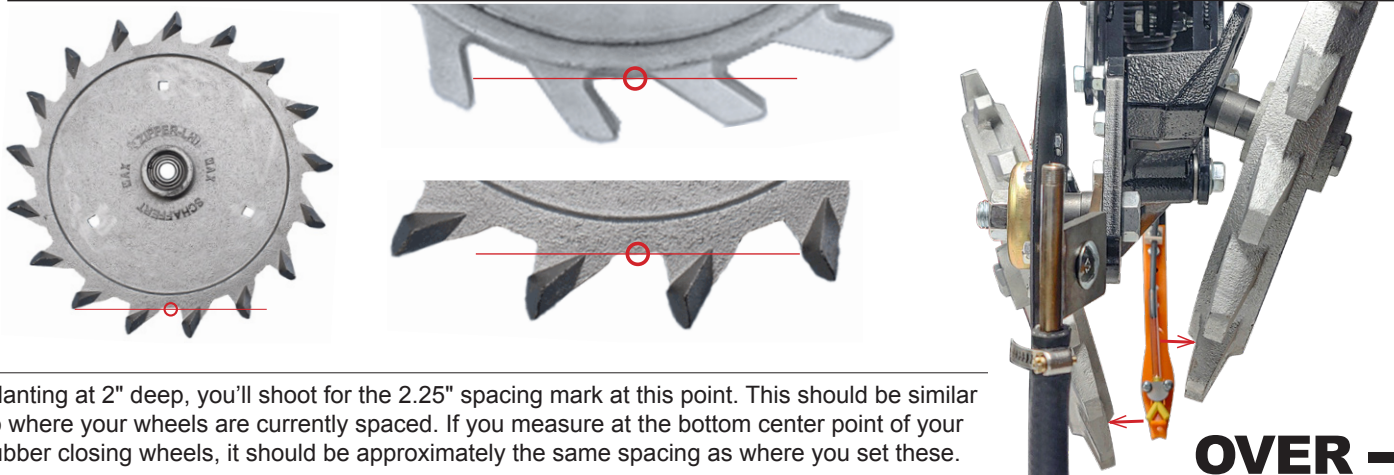

Planting at 2" deep, you'll shoot for the 2.25" spacing mark at this point. This should be similar to where your wheels are currently spaced. If you measure at the bottom center point of your rubber closing wheels, it should be approximately the same spacing as where you set these.

OVER →


MOHAWK / ZIPPER TROUBLESHOOTING

Setting the Wheel Distance

STAGGERED & OFFSET WHEELS

Q: *How do I measure 2.25" (2"-2.5") distance between the wheels when my wheels are staggered or offset?*

A: *Lay a flat iron, ruler, or other similar object parallel through the middle of your closing wheels. Measure the width of your flat iron. Then split the difference between it and 2.25 to figure out how far away from the flat iron each wheel should be.*


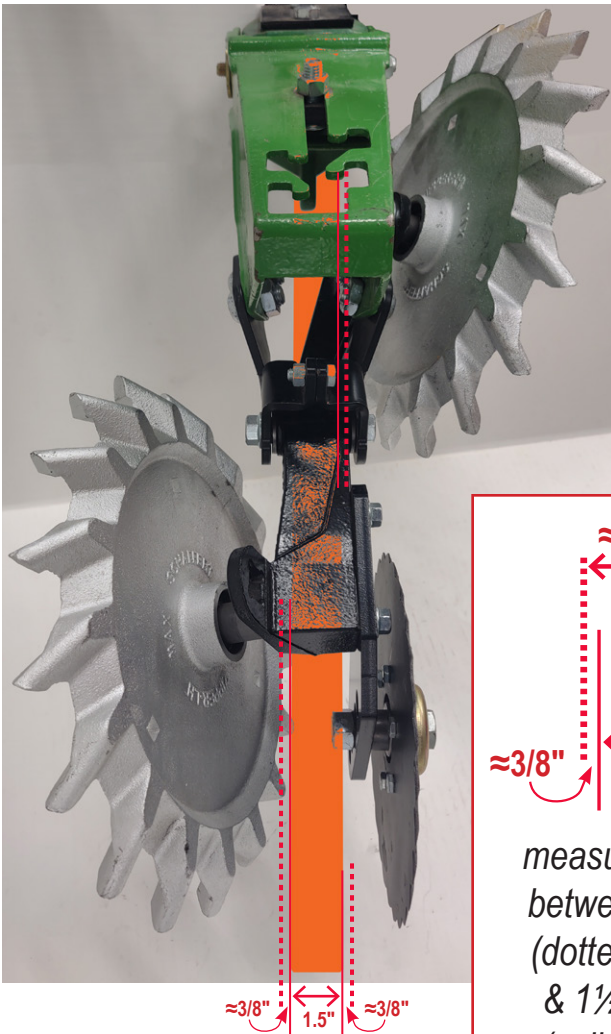


EXAMPLE:

Our flat iron is 1.5" wide.

$$2.25 - 1.5 = 0.75. \rightarrow 0.75 / 2 = 0.375" \text{ or } 3/8"$$

To approximate 3/8", we'll measure 1/4" away from the flat iron on each side and make sure our wheel is at least that far away, but no more than 1/2" away, from the flat iron at the wheel's point of measurement.

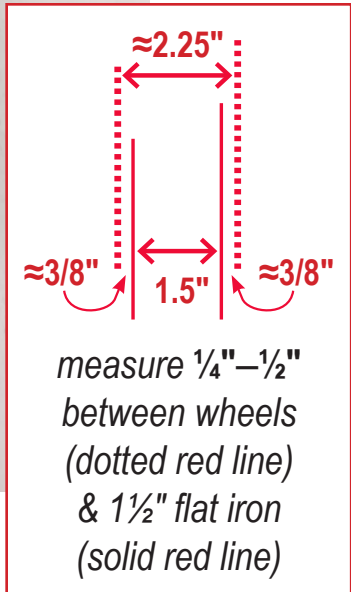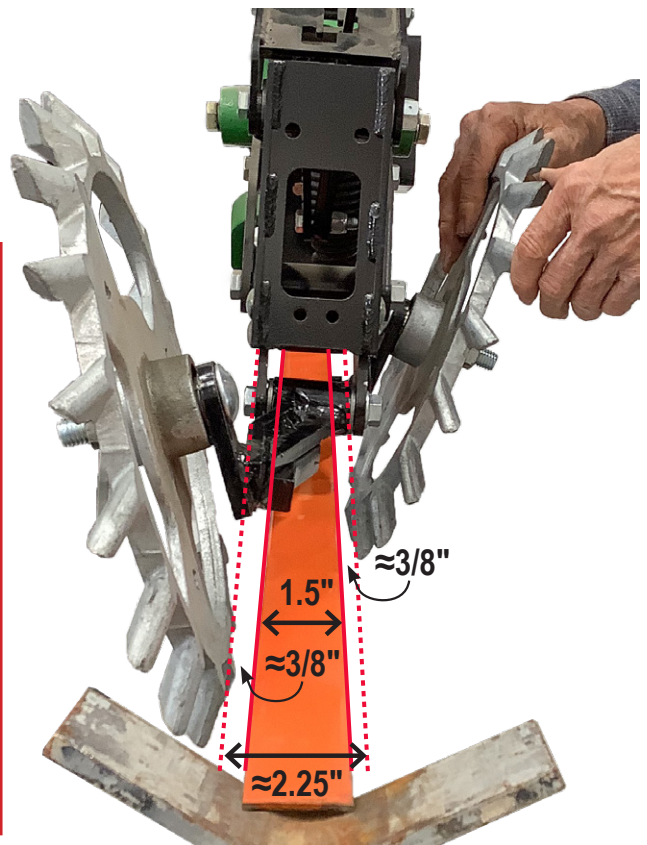

Planting at 2" deep, you'll shoot for the 2.25" spacing mark at this point. This should be similar to where your wheels are currently spaced. If you measure at the bottom center point of your rubber closing wheels, it should be approximately the same spacing as where you set these.

EXAMPLE : OUR FLAT IRON IS 1.5" WIDE

DESIRED WIDTH/DISTANCE BETWEEN TWO WHEELS*	2.25"
[MINUS] WIDTH OF FLAT IRON	- 1.50"
[EQUALS] DISTANCE REQUIRED BETWEEN THE FLAT IRON & WHEELS*	0.75"
DISTANCE REQUIRED BETWEEN THE FLAT IRON & WHEELS*	0.75"
[DIVIDED BY] TWO SIDES/WHEELS	÷ 2
[EQUALS] DISTANCE BETWEEN WHEEL* & FLAT IRON ON EACH SIDE	0.375"
[EQUALS]	= 3/8"

*MEASURED FROM WHEELS' POINT OF MEASUREMENT, SEE OTHER SIDE