

REBOUNDER™ MOUNTING INSTRUCTIONS

Haybuster Drills

(Read Instructions Completely before Beginning Installation)

Before working on your planter or drill

DANGER: when storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the Rebounder. **WARNING:** do not roll back or back up the planter in or on the ground as this can result in damage to the Rebounder.

Mounting Instructions

Before you begin, verify all items listed in the “package contents” table.


- Step #1:** before installing the first Rebounder on your drill, read the **HELPFUL HINTS FOR MOUNTING REBOUNDERS TO DRILLS** on the reverse side of this sheet.
- Step #2:** remove one opener disc from the drill. Remove scraper nuts and washers. With Rebounder bracket in place, replace bolt with 5/16” x 1 1/4” bolt provided. Center Rebounder bracket between discs and tighten nut in place.
- Step #3:** now you are ready to install the Rebounder to the bracket. (3 of the 7 holes have been trimmed off the top of the drill Rebounder so it will fit the Rebounder bracket on the Haybuster drill.) place the Rebounder on the bottom side of the Rebounder bracket. Place the 1/4” x 1” bolts in the 2nd and 3rd holes of the Rebounder (counting up from the bottom of the Rebounder) and insert into the 2nd and 4th holes of the Rebounder bracket. With this setting, set planter on a flat surface, the Rebounder should be about 3/8” off the floor or flat surface. Tighten the nut on the Rebounder.

Rebounder Package Contents (per single row)	
Item	Quantity
Rebounder	1
1/4 x 1” bolts	2
L-bracket	1
Whiz Nut	1
1/4” Nut	1
Instruction Sheet	1
Bracket Package Contents (per single row)	
Item	Quantity
Bracket	1
5/16 x 1 1/4” bolt	1
5/16” lock nut	1

Example Settings: with the new discs on the drill and the press wheel washers set in the middle position (that is, with approximately 4 washers on the top side), proceed as follows:

- Step #4:** Place the L-bracket over the top bolt using the 1/4” whiz nut; use the common nut on the other bolt. Tighten both bolts in place.
- Step #5:** If discs are worn, make adjustments accordingly.

Optional fittings are available for fertilizer/chemical applications. Options include, Y-Not Split-It, Hose Holder, or the Straight Shot, each available for an additional charge.

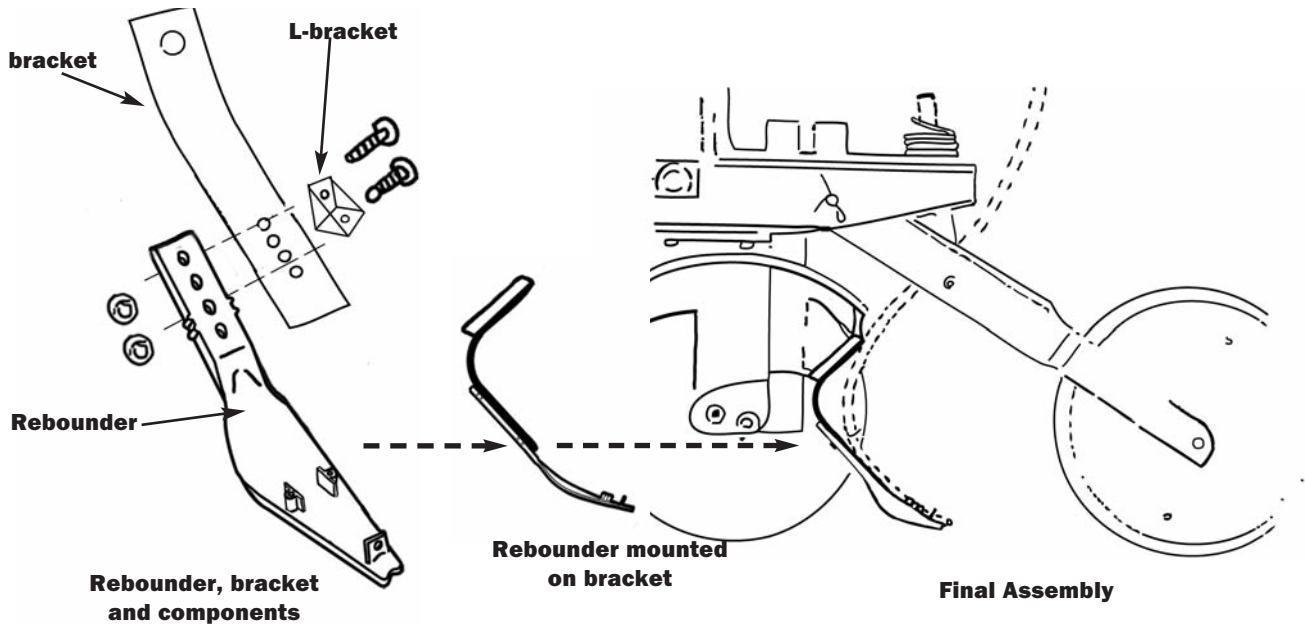

Rebounder covered by one or more of the following U.S. patents: 5,640,915; 5,918,557; 6,082,275; 6,283,050; 6,453,832; 6,763,773 and 7,121,216.

HELPFUL HINTS FOR MOUNTING THE REBOUNDER™ ON DRILLS


(Read Instructions Completely before Beginning Installation)

Before working on your planter or drill

DANGER: when storing or working on the planter always install cylinder stops or place the planter on stands to prevent personal injury or damage to the Rebounder. **WARNING:** do not roll back or back up the planter in or on the ground as this can result in damage to the Rebounder.

Helpful Hints

- Step #1:** use a farm jack on the press wheel to raise up the drill unit 3-4" before you mount the first row.
IMPORTANT: have press wheel adjusting handle of knob, in the position you would normally run in the field (see **fig (a)**).
- Step #2:** slide a board or piece of flat iron under the double disc openers and back under the press wheel tire. The board or flat iron represents the bottom of the seed V.
- Step #3:** now you can bolt the Rebounder to the bracket on the drill. Position the Rebounder on the bracket so that the trailing end will be from 3/8" - 1/2" off the board or flat iron. Using the 1/4" bolts attach the Rebounder to the bracket on the drill.
- Step #4:** variances in the disc blade size will occur among individual drills as well as within any single drill. Measure discs behind the tire track rows. If they are worn more than other rows this process may need to be used to set these rows also.
- Step #5:** if replacing Rebounders on previously installed brackets, simply remove the old Rebounder without removing the disc blade. Using a small bar magnet or a long handled magnet, place the bolt on the magnet and slide it up between the discs and into the holes of the bracket and the Rebounder. This allows you to come in behind with a wrench or socket to install and tighten the nuts.

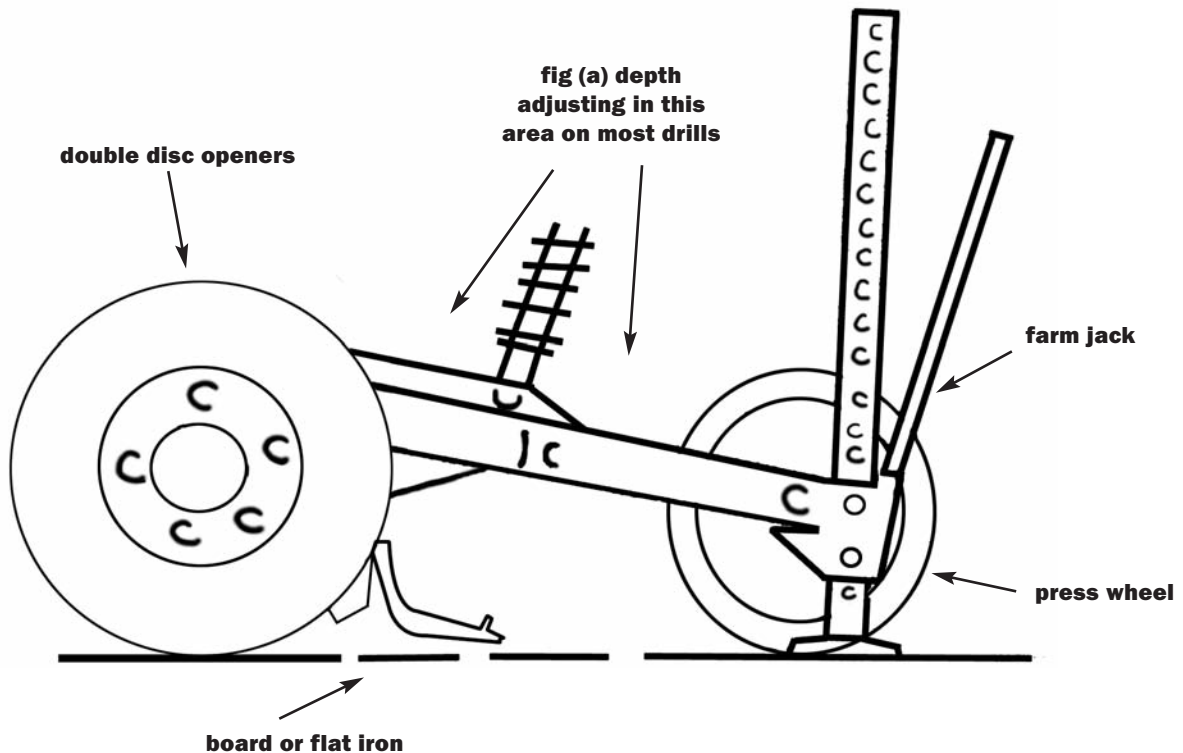

Rebounder covered by one or more of the following U.S. patents: 5,640,915; 5,918,557; 6,082,275; 6,283,050; 6,453,832; 6,763,773 and 7,121,216.