

# REBOUNDER™ MOUNTING INSTRUCTIONS

## UFT Standard Drills

(Read Instructions Completely before Beginning Installation)

**Before working on your planter or drill**

**DANGER:** When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder. **WARNING:** Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

### Mounting Instructions

Before you begin, verify all items listed in the "package contents" table at the right.

**NOTE:** ■ See HELPFUL HINTS FOR MOUNTING REBOUNDERS TO DRILLS (on back).

**Step #1:** **NOTE:** If applying liquids in furrow with the Rebounder, attach either Y-Not Split It, Hose Holder, or Straight Shot kit by following kit directions. See kit instructions.  
**INSTALL KIT BEFORE INSTALLING REBOUNDER TO BRACKET IF USING LIQUIDS IN-FURROW.**

**Step #2:** Place the Rebounder over the 5/16" carriage bolt on the Rebounder's bracket and line the bolt up in the center of the Rebounder's slot. Install the flat washer over the Rebounder, and thread on the 5/16" whiz nut. Tighten.


**NOTE:** If applying liquids in furrow, place the fertilizer kit's L-bracket and washer under the lock nut.

**Step #3:** Remove the drill scraper nut and install the Rebounder bracket over the scraper. Re-install the nut and tighten it into place. The Rebounder will naturally hang below disc blades 1"-2", and flex up when planting to follow the seed V made.

Rebounder Package Contents (per single row)	
Item	Quantity
Rebounder . . . . .	1
Washer . . . . .	1
5/16" Whiz Nut . . . . .	1
Instruction Sheet . . . . .	1

Bracket Package Contents (per single row)	
Item	Quantity
Mounting Bracket. . . . .	1

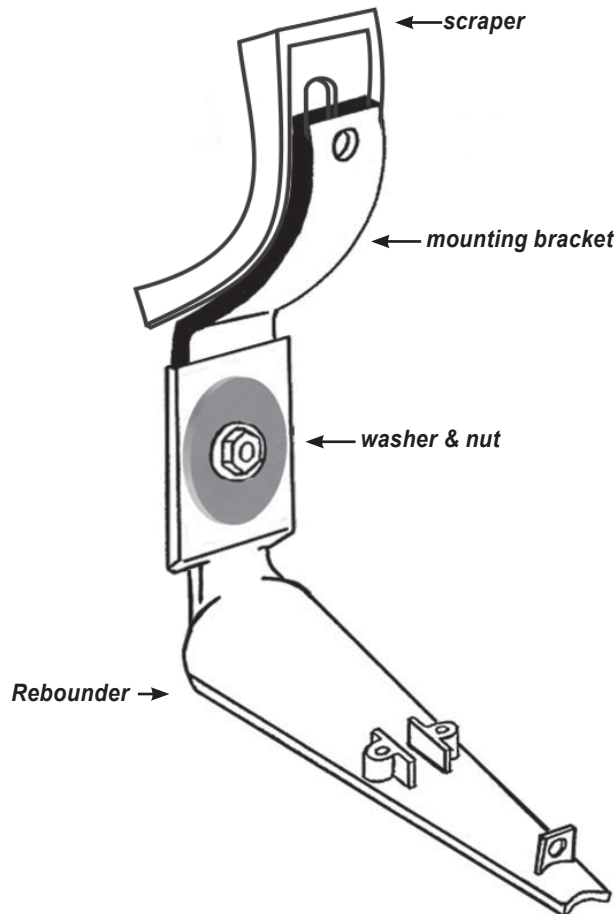

## **HELPFUL HINTS FOR MOUNTING THE REBOUNDER™ ON DRILLS**

(Read Instructions Completely before Beginning Installation)

### **Before working on your planter or drill**

**DANGER:** When storing or working on the drill always install cylinder stops or place the drill on stands to prevent personal injury or damage to the Rebounder.

**WARNING:** Do not roll back or back up the drill in or on the ground as this can result in damage to the Rebounder.

### **Helpful Hints**

**Step #1:** use a farm jack on the press wheel to raise up the drill unit 3-4" before you mount the first row.

**IMPORTANT:** have press wheel adjusting handle of knob, in the position you would normally run in the field (see **fig (a)**).

**Step #2:** slide a board or piece of flat iron under the double disc openers and back under the press wheel tire. The board or flat iron represents the bottom of the seed V.

**Step #3:** now you can bolt the Rebounder to the bracket on the drill. Position the Rebounder on the bracket so that the trailing end will be from 3/8" - 1/2" off the board or flat iron. Using the 1/4" bolts attach the Rebounder to the bracket on the drill.

**Step #4:** variances in the disc blade size will occur among individual drills as well as within any single drill. Measure discs behind the tire track rows. If they are worn more than other rows this process may need to be used to set these rows also.

**Step #5:** if replacing Rebounders on previously installed brackets, simply remove the old Rebounder without removing the disc blade. Using a small bar magnet or a long handled magnet, place the bolt on the magnet and slide it up between the discs and into the holes of the bracket and the Rebounder. This allows you to come in behind with a wrench or socket to install and tighten the nuts.

